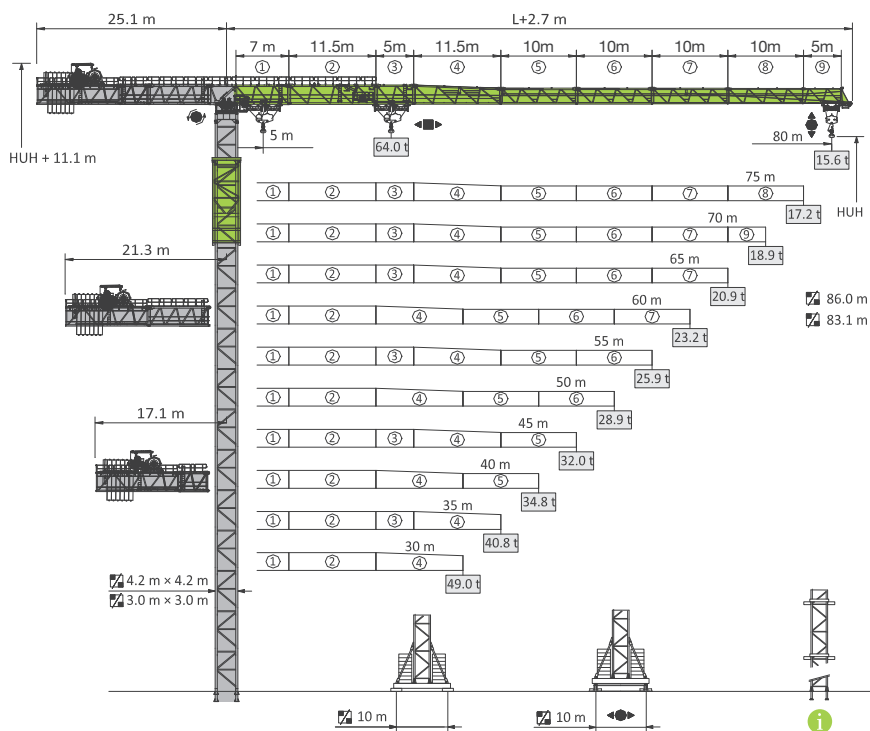
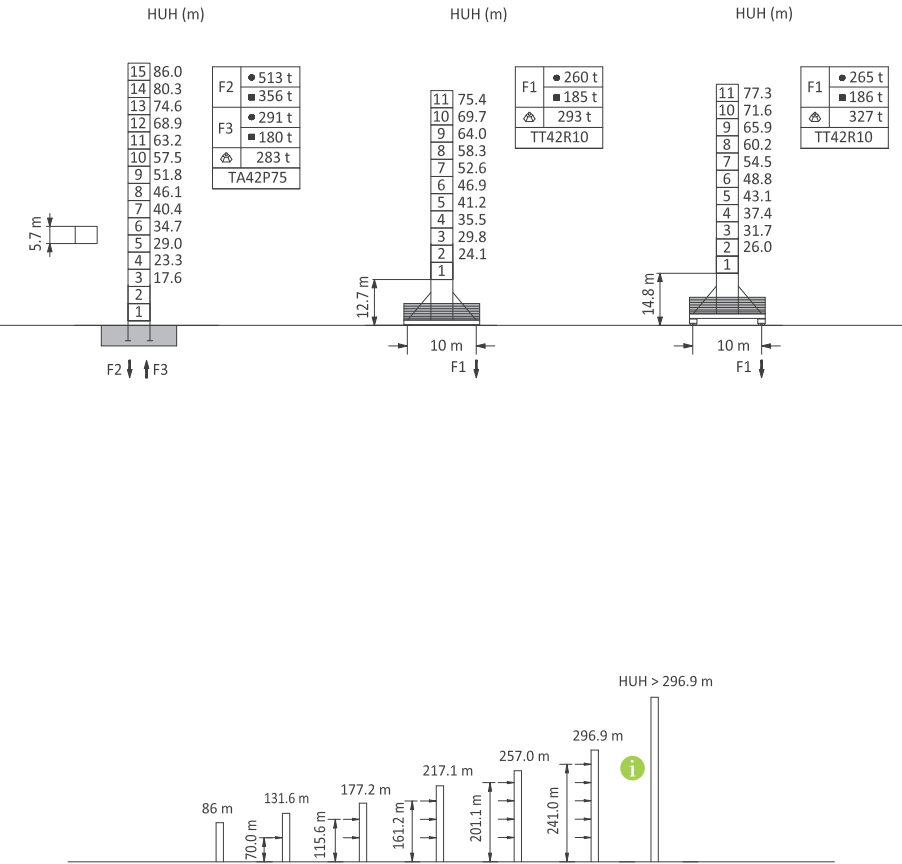


R1300-64



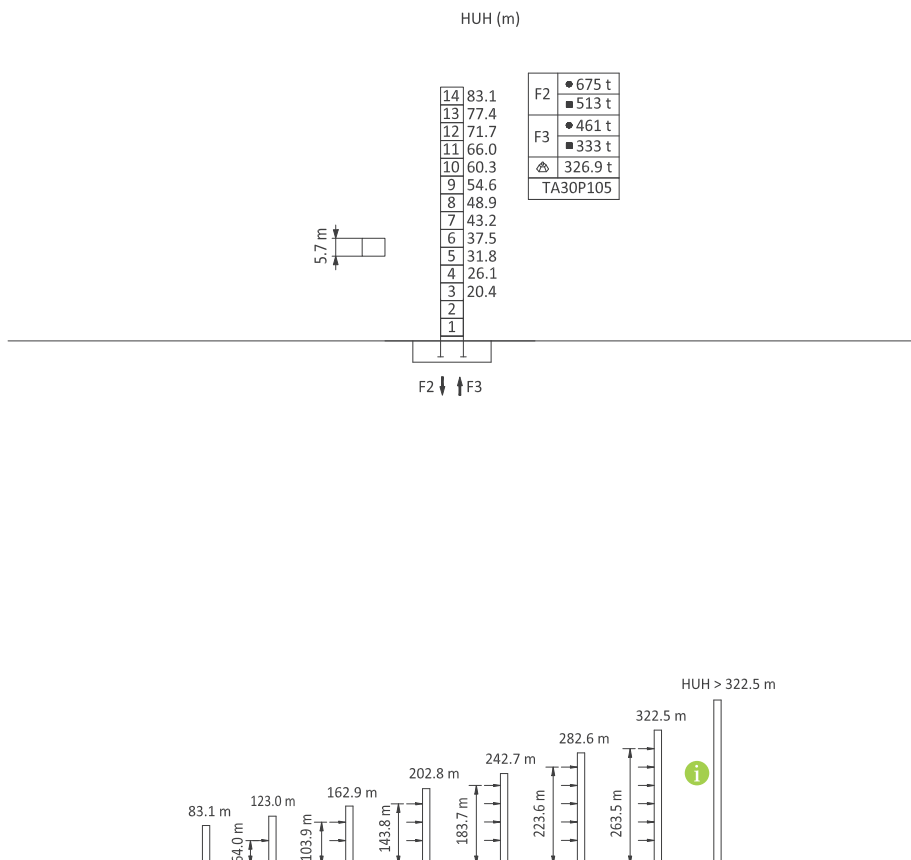
塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

4.2m – QB R1300-64QB



Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

3.0m – WZ R1300-64WZ



起重性能 / Load diagrams / Lastkurven




bd—Ubd

Lift height, m		m / t	12.5	15.0	17.5	20.0	22.5	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0
80.0	bd	5.0-43.5/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	30.81	27.30	24.44	22.07	20.07	18.37	16.89	15.60
	Ubd	5.0-22.7/64.0	64.00	64.00	64.00	64.00	64.00	57.20	46.24	38.52	32.80	28.38	24.87	22.01	19.64	17.64	15.93	14.46	13.17
75.0	bd	5.0-44.2/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	31.34	27.77	24.87	22.46	20.43	18.70	17.20	
	Ubd	5.0-23.0/64.0	64.00	64.00	64.00	64.00	64.00	58.17	47.03	39.20	33.39	28.90	25.34	22.44	20.03	18.00	16.27	14.77	
70.0	bd	5.0-44.6/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	31.65	28.05	25.13	22.70	20.65	18.90		
	Ubd	5.0-23.2/64.0	64.00	64.00	64.00	64.00	64.00	58.75	47.51	39.61	33.74	29.22	25.62	22.69	20.27	18.22	16.47		
65.0	bd	5.0-45.0/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	28.38	25.42	22.97	20.90			
	Ubd	5.0-23.4/64.0	64.00	64.00	64.00	64.00	64.00	59.42	48.07	40.08	34.15	29.58	25.95	22.99	20.54	18.47			
60.0	bd	5.0-45.4/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	28.66	25.68	23.20				
	Ubd	5.0-23.6/64.0	64.00	64.00	64.00	64.00	64.00	59.99	48.54	40.48	34.50	29.89	26.23	23.24	20.77				
55.0	bd	5.0-45.7/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	28.91	25.90					
	Ubd	5.0-23.8/64.0	64.00	64.00	64.00	64.00	64.00	60.50	48.96	40.84	34.82	30.17	26.47	23.47					
50.0	bd	5.0-45.7/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	28.90						
	Ubd	5.0-23.8/64.0	64.00	64.00	64.00	64.00	64.00	60.48	48.95	40.83	34.81	30.16	26.47						
45.0	bd	5.0-45.7/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00							
	Ubd	5.0-23.8/64.0	64.00	64.00	64.00	64.00	64.00	60.37	48.85	40.75	34.74	30.10							
40.0	bd	5.0-45.7/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00	32.00							
	Ubd	5.0-23.8/64.0	64.00	64.00	64.00	64.00	64.00	60.47	48.94	40.82	34.80								
35.0	bd	5.0-45.7/32.0	32.00	32.00	32.00	32.00	32.00	32.00	32.00										
	Ubd	5.0-23.8/64.0	64.00	64.00	64.00	64.00	64.00	60.44	48.91	40.80									
30.0	bd	5.0-45.8/32.0	32.00	32.00	32.00	32.00	32.00	32.00											
	Ubd	5.0-23.8/64.0	64.00	64.00	64.00	64.00	64.00	60.55	49.00										

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz			bd			Ubd			kW	
	H200FL160-1150D	t	8	16	32	16	32	64	200	1150 m 
		m/min	85	61	30.5	42.5	30.5	15.3		
	S185CA-350.275CD20_13Bx2 S185CN-350.275CD20_13Bx1	r/min	0 - 0.6						3×18.5	
	T185FC80	m/min	0 - 50						18.5	
	ZA110-B ZB110-B	m/min	0 - 15						2×11 2×11	
			274 kW + 4×11 kW							









Counter-jib ballast / Gegenauslegerballast / 平衡重



 m	 m	12.5 t	10t	6.5 t	 (t)	PHZ12500E	PHZ10000K	PHZ6500F
80.0	25.1	5	1	0	72.5	 (mm)	 (mm)	 (mm)
75.0		5	0	1	69			
70.0		4	1	1	66.5			
65.0		5	0	0	62.5			
60.0	21.3	6	0	0	75.0			
55.0		6	0	0	75.0			
50.0		4	1	1	66.5			
45.0		4	1	1	66.5			
40.0	17.1	6	0	1	81.5			
35.0		5	1	1	79.0			
30.0		5	1	0	72.5			







Central ballast / Zentralballast / 压重








运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		8.46	1.85	2.88	7500
		3.94	1.85	2.85	4200
		11.07	1.98	2.95	10200
起重臂节 Jib section Auslegerement	 ①	11.00	2.26	3.94	13300
	 ②	12.00	1.83	3.07	10600
	 ③	5.14	1.90	2.84	4200
	 ④	11.96	1.90	2.84	7200
	 ⑤ ⑥ ⑦ ⑧	10.48	1.90	2.37	4600
		10.48	1.90	2.37	3600
		10.39	1.90	2.56	2600
		10.29	1.90	2.23	2000
	 ⑨	5.24	1.90	2.20	800
	 ⑩	1.52	1.90	2.86	500
载重小车 Trolley Laufkatze		5.00	2.28	1.50	2000
吊钩 Pulley block Hubflasche		2.20	0.40	3.00	2400
司机室 Cabin Kabine		2.08	1.50	2.24	800
起升机构 Hoisting mechanism Hubwerk	 H200FL160-1150D	4.71	2.88	2.12	15300
变幅机构 Trolleying mechanism Katzfahwerk	 T185FC80	2.05	0.98	1.05	1710

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
扒杆 Derrick Derrick		2.98	1.16	2.85	1200
回转总成 Slewing assembly Drehteile		3.80	3.00	2.98	21200

塔身 / Crane tower / Kranturm		L (m)	B (m)	H (m)	kg (±5%)
过渡梁 Transition beam Übergangsträger	 4.2 m - S42P75	7.40	0.80	2.20	5200
	 4.2 m - S42P75	3.50	0.70	2.20	2x2500
过渡节 Transition section Übergangsstück	 3.0 m - BZJW4B	6.17	3.81	3.84	13900
引进小车 Mounting trolley Einführungslaufkatze	 4.2 m - M42P75	1.83	2.34	0.30	400
提升架 Lifting frame Hubrahmen	 4.2 m - M42P75	3.49	3.49	0.79	700
引进梁 Mounting beam Einführungsträger	 4.2 m - M42P75	7.80	2.15	0.41	1200
引进专用吊钩 Mounting hook Montagehaken	 4.2 m - M42P75	0.91	0.64	1.00	200
引进梁 Mounting beam Einführungsträger	 3.0 m - M30P105	7.50	0.30	0.58	1800
爬升架 Climbing tower section Kletterturmstück	 4.2 m - TC42P90L	13.30	2.86	2.87	4x5980
	 3.0 m - TC30P90U	11.98	3.89	2.18	2x8300

运输单元 / Dimensions and weight / Abmessungen und Gewicht

塔身 / Crane tower / Kranturm		L (m)	B (m)	H (m)	kg (±5%)
标准节 Tower section Turmstück	 4.2 m - X42D/X42Rb	6.00	0.51	0.44	4x1200
	 4.2 m - X42D/X42Rb	1.61	0.17	0.25	8x200
	 4.2 m - X42D/X42Rb	1.72	0.15	0.15	8x100
支腿 Fixing angles Fundamentanker	 TA42P75	1.25	0.30	0.30	4x700
	 TA30P105	2.31	0.66	0.66	4x1000
底架基础节 Basic mast unit Grundmasteinheit	 TT42R10	6	1.02	0.88	4x1200
	 TT42R10	1.61	0.17	0.25	8x200
撑杆 Border support Randträger	 TT42R10	10.10	0.41	0.41	4x2400
	 TT42R10	3.49	0.40	0.26	2x265
片梁 Chassis beam Unterwagentraverse	 TT42R10	4.85	0.42	0.26	325
	 TT42R10	11.00	3.62	1.28	2x11100