

ZOOMLION

ELECTRIC ARTICULATING BOOM LIFTS

ZA64JE

Comply with ANSI/CSA Standard



HIGHLIGHTS

- ▶ Provide greater work height of 70ft 4in/21.45m and lift capacity of 550lb/250kg than competitors (ZA64JE Only)
- ▶ Fast lift system directly lowers the boom from the highest position to the ground, no need to fold the boom to improve work efficiency (ZA64JE Only)
- ▶ Accurate and efficient traveling AC drive system and onboard motion AC drive system provides strong power, control, and maintenance-free motor
- ▶ Center layout, great structural rigidity, and small boom deflection
- ▶ Advanced dual control system (valve control + pump control) offer an energy-saving, smooth, and efficient control
- ▶ Accurate and efficient traveling AC drive system provides strong power and stable control
- ▶ 52ft 6in working height



FEATURES

Standard Features

Proportional control	On-board diagnostic system
All motion alarm	Over tilt protection system
Flashing beacon	Oscillating axle (ZA64JE)
Self-closing entry gate	Load sensing system
Emergency descent system	4.3' LED display
Emergency stop button	Horn
Auto-leveling system	

Accessories & Options

- ▶ AC power to platform
- ▶ Air line to platform
- ▶ 8.01ftx2.99ft work platform(ZA64JE)
- ▶ Non-marking tire

ACCESS WITH ZOOMLION GREEN

Phone: 1 (833) USA-ZOOM
E-mail: sales@zoomlion-na.com

Add: Zoomlion Heavy Industry NA, Inc. 14215 Two Mile Road, Yorkville, WI 53126
Web: www.zoomlion-na.com



ZOOMLION

ELECTRIC ARTICULATING BOOM LIFTS

ZA64JE

Comply with CE/ANSI/CSA Standard

Model	ZA64JE	
	Imperial	Metric
Size		
Work Height	70ft 4in	21.45m
Platform Height	63ft 10in	19.45m
Horizontal Outreach	39ft 6in	12.05m
Up and Over Height	27ft 1in	8.25m
A - Stowed Length	28ft 7in	8.72m
B - Stowed Width	8ft 1in	2.46m
C - Stowed Height	8ft 3in	2.52m
D - Platform Length	8.1ft	2.44m
E - Platform Width	3ft	0.91m
Jib Length	5ft	1.53m
F - Wheelbase	8ft 3in	2.52m
G - Ground Clearance	1ft 1in	0.33m
Performance		
Platform Capacity	550 lb	250kg
Drive Speed	3.79 mph	6.1km/h
Gradeability	45%(24°)	
Axles Oscillation	8in	0.20m
Turning Radius (Inside)	9ft 1in	2.78m
Turning Radius (Outside)	18ft	5.49m
Swing	360° continuous	
Platform Rotation	±90°	
H-Tail Swing	2ft	0.6m
Max. Wind Speed	28mph	12.5m/s
Power		
Battery	24×2V/440Ah	
Charger	48V/60A	
Drive Motor	AC 32V/4.4hp	AC 32V/3.3kW
Lift Motor	AC 32V/13.4hp	AC 32V/10kW
Auxiliary Power	12V DC	
Hydraulic Tank Capacity	19.8 (us gal)	75L
Drive	4WD	
Tire		
Type	33×12 D610 Foam-filled Tires	
Weight		
Gross	20283 lb	9200kg

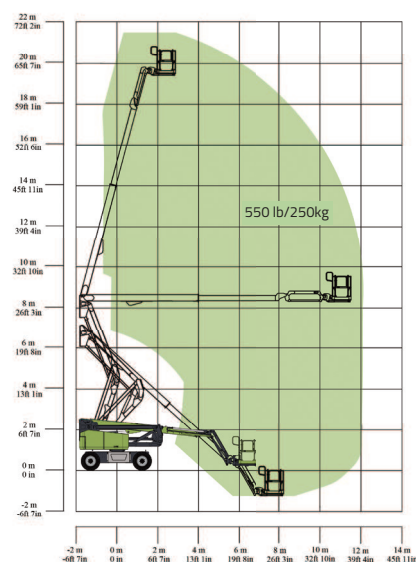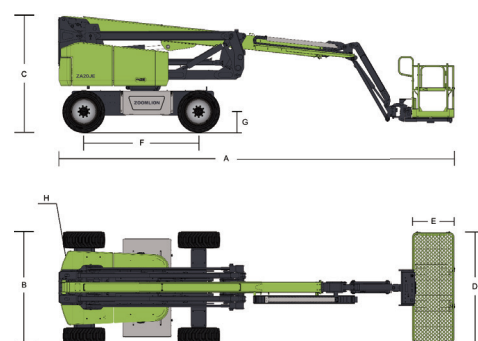

Range of Motion ZA64JE