

ZOOMLION TELESCOPIC BOOM LIFT ZT48J

Comply with CE/ANSI/CSA Standard



HIGHLIGHTS

- ▶ 300kg/454kg dual capacity for flexible application
- ▶ Smooth leveling and good steering sensitivity
- ▶ Euro V emission, green and environmental protection
- ▶ Compact design and folded jib, easy to transport



FEATURES

Standard Features

Horn
Proportional control
All motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Auto-leveling system
On-board diagnostic system
Tilt protection system
Oscillating axle
4.3' Led display
Swing-out engine tray
Anti-crushing device

Accessories & Options

- ▶ Platform work light
- ▶ Anti-collision device
- ▶ AC power to platform



ACCESS WITH ZOOMLION GREEN



Phone: 0086(731)-88353680 0086(731)-88250971
E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

MAIN SPECS OF TELESCOPIC BOOM LIFT ZT48J

Comply with CE/ANSI/CSA Standard

Model	ZT48J
Size	
Work Height	54ft 6in
Platform Height	47ft 11in
Horizontal Outreach	41ft 8in
A - Stowed Length	31ft 6in
B - Stowed Width	7ft 6in
C - Stowed Height	8ft 3in
D - Platform Length	8ft
E - Platform Width	3ft
F - Wheelbase	7ft 9in
Tread	7ft 6in
G - Ground Clearance	1ft 2in
Performance	
Platform Capacity (Unrestricted/Restricted)	660/1000lb
Drive Speed (Stowed)	3.42mph
Gradeability	45% (24°)
Turning Radius (Inside)	6ft 9in
Turning Radius (Outside)	15ft 8in
Turntable Swing	360° continuous
Platform Rotation	±90°
Tail Swing	2ft 11in
Max. Wind Speed	28mph
Power	
Engine	Kubota V2403 (Euro V)
Fuel Tank Capacity	39.6 (us gal)
Control Voltage	12V DC
Hydraulic Tank Capacity	23.8 gal
Drive Mode	4WD
Steering Mode	Front-wheel
Tire	
Type	Foam-filled tire (standard) Solid tire/Seamless tire (option)
Weight	
Gross	18739lb

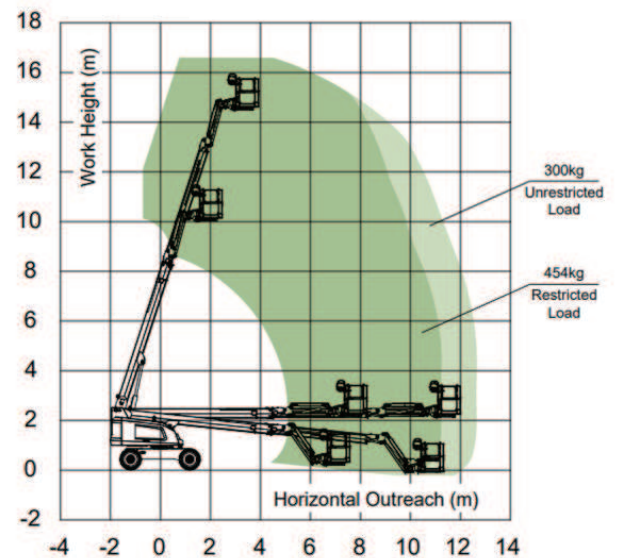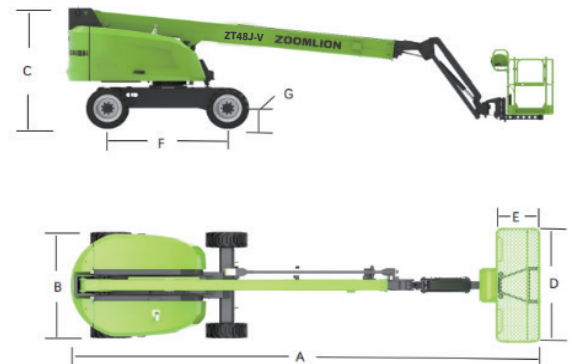

Range of Motion ZT48J-V